

BCQ1300 & BDQ1300 Series

Data Sheet

1300 W Quarter brick

Total Power: 1300 W
Input Voltage: 40 - 60 Vdc
of Outputs: Single

SPECIAL FEATURES

- Delivers up to 1300 W
- Ultra-high efficiency above 97%
- Startup Pre-bias
- Input range: 40 V – 60 V
- PMBus™ function (BDQ1300)
- Parallel current sharing (BCQ1300)
- Excellent thermal performance
- No minimum load requirement
- Fixed switching frequency
- Base-plate for contact cooling or heatsink mounting
- ROHS 3.0 (2011/65/EU) compliant
- Input under voltage lockout
- Input over voltage lockout
- Output over current protection
- Output over voltage protection (BDQ1300)
- Over temperature protection
- Pin length option: 4.6 mm

SAFETY

- IEC/EN/UL/CSA 62368-1
- CE
- UL/TUV
- UL94,V-0




Electrical Specifications

	BCQ1300	BDQ1300
Input		
Input range	40-60 Vdc	40-60 Vdc
Efficiency (50% load)	97.7%	97.5%
Output		
Factory set voltage	13.13 Vdc	12.15 Vdc
Output voltage total regulation	9.6~14.5 Vdc	8.85~12.55 Vdc
Load regulation	400 mV max	120 mV max
Noise/ripple	140 mV	200 mV
Output current	90 A	107 A
Over voltage protection	NA	Hiccup, Auto-restart
Over current protection	Hiccup, Auto-restart	Hiccup, Auto-restart
Over temperature protection	Auto-recovery	Auto-recovery
Temperature coefficient	±0.02/°C	±0.02/°C
Isolation		
I/O isolation (input to output)	1500 Vdc	800 Vdc

Environmental Specifications

Operating ambient temperature range	-40 °C to +85 °C
Storage temperature	-55 °C to +125 °C
Humidity	5% to 95% (non-condensing)
MTBF	1.5 Million hours
RoHS Compliant	Yes

Mechanical Drawing and Pin Assignments (BCQ1300)

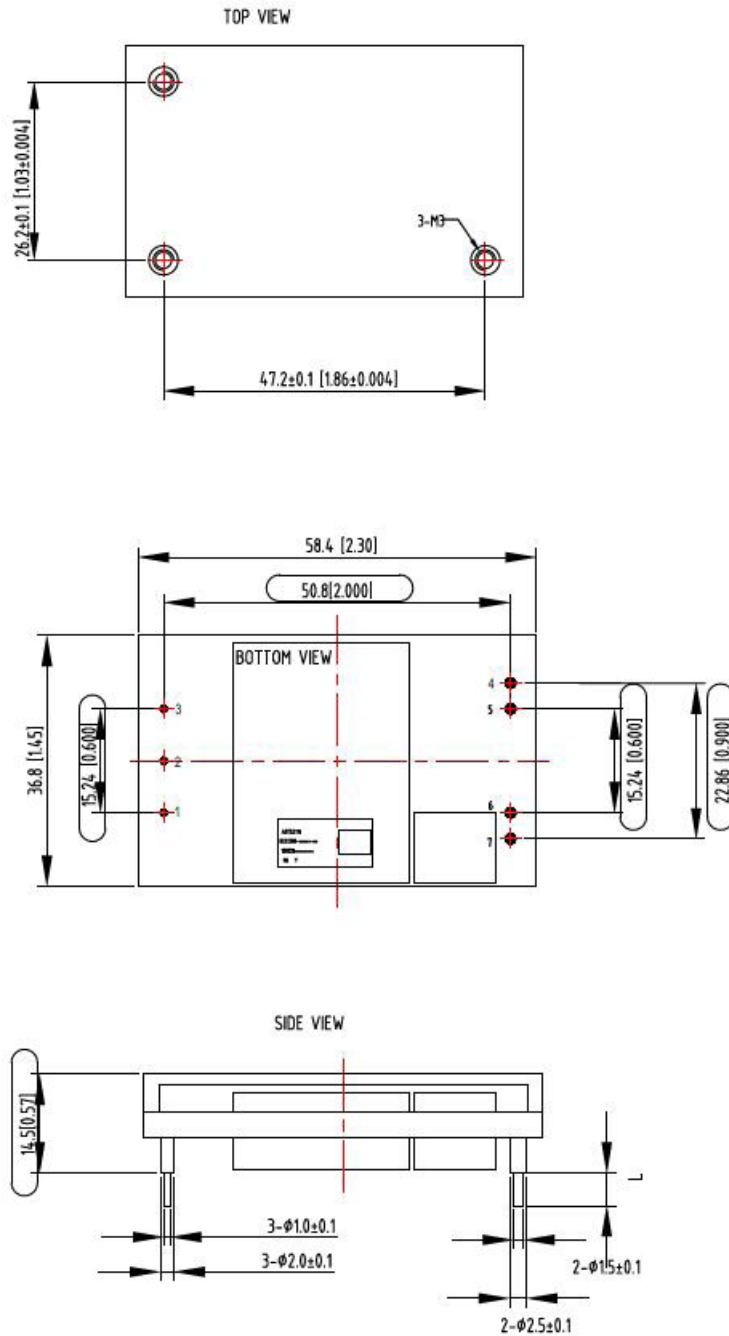




UNIT: mm (inch)

L=4.60mm

TOLERANCE: X.X mm±0.5mm [X.XX in.± 0.02in.]
 X.XX mm±0.25mm[X.XXX in.±0.01in.]

Pin No	Name	Function
1	Vin+	Positive input voltage
2	Remote On/Off	Remote control
3	Vin-	Negative input voltage
4&5	Vo-	Negative output voltage
6&7	Vo+	Positive output voltage

Mechanical Drawing and Pin Assignments (BDQ1300)

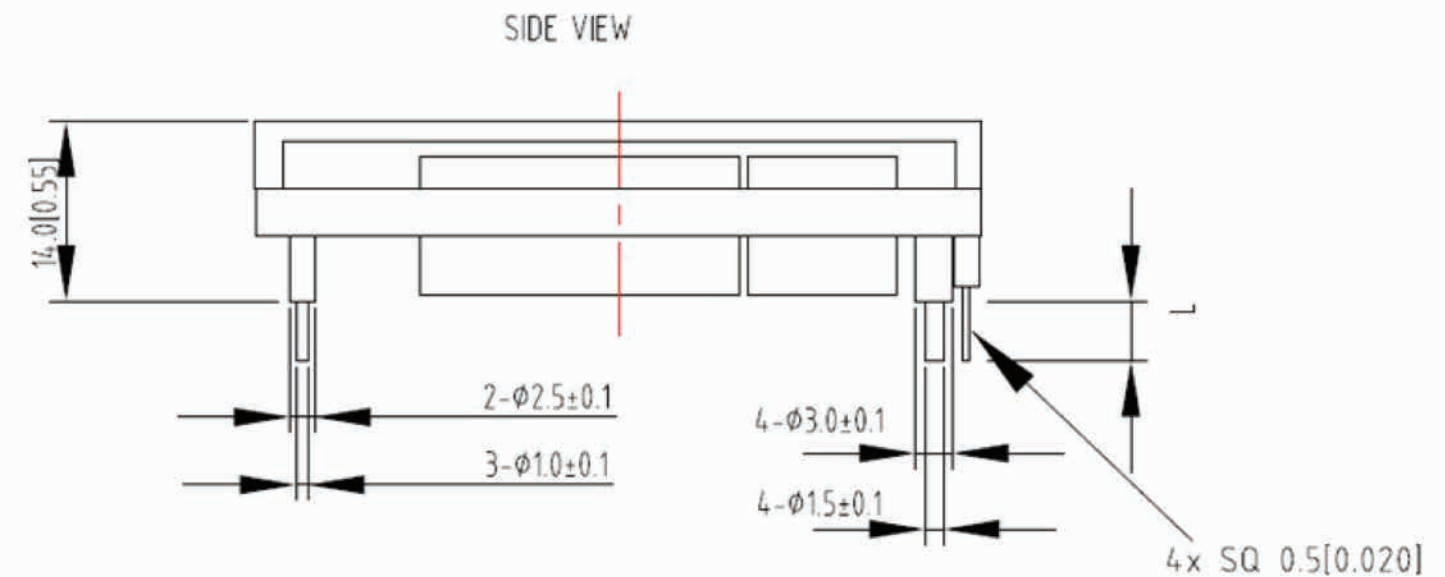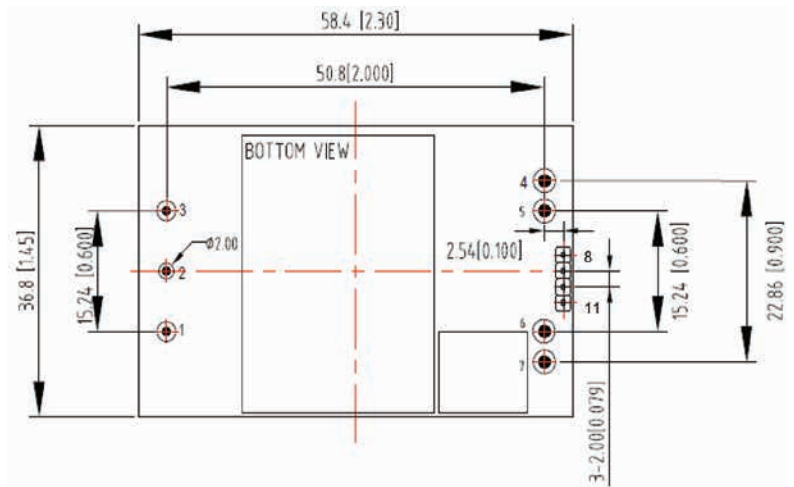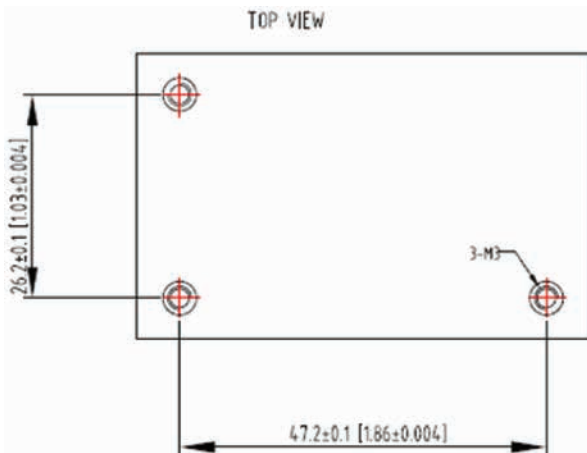

UNIT: mm (inch)

L=4.60mm

TOLERANCE: X.X mm±0.5mm [X.XX in.± 0.02in.]

X.XX mm±0.25mm [X.XXX in.±0.01in.]

Notes: 1. Dimensions within the box are critical dimensions.

2. BDQ1300-48S12B-4LI with pin8~11,
BDQ1300-48S12B-4L without pin8~11

3. The minimum clearance from customer PCB is
0.25 mm [0.01in.].

4. Heatsink mounting holes (M3) permit max 3.0 mm
screw penetration depth into baseplate

Pin No	Name	Function
1	Vin+	Positive input voltage
2	Remote ON/OFF	Remote control
3	Vin-	Negative input voltage
4	Vo-	Negative output voltage
5	Vo-	Negative output voltage
6	Vo+	Positive output voltage
7	Vo+	Positive output voltage
8	Data	PMBus™ Data
9	Alert	PMBus™ Alert signal
10	Clock	PMBus™ Clock
11	Addr	PMBus™ Address

Notes:

1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 2 years
3. Label and logo appearance may vary from what is shown on mechanical drawings.

Ordering Information

Standard	Output Voltage	Structure	Pin Tyoe	RoHS Status	PMBus™
BDQ1300-48S12B-4LI	12.15 Vdc	Baseplate	Through hole	ROHS3.0 (2011/65/EU)	Yes
BDQ1300-48S12B-4L	12.15 Vdc	Baseplate	Through hole	ROHS3.0 (2011/65/EU)	No
BCQ1300-48S12B-4L	9.6 Vdc~14.5 Vdc	Baseplated	Through hole	ROHS3.0 (2011/65/EU)	No

- Standard version is negative enable
 - "-4" = 4.6 mm pin length
 - "-L" = RoHS 6 compliance

WORLDWIDE OFFICES

Americas

2900 South Diablo Way
 Suite B100
 Tempe, AZ 85282, USA
 +1 888 412 7832

Europe (UK)

Ground Floor Offices, Barberry House
 4 Harbour Buildings, Waterfront West
 Brierley Hill, West Midlands
 DY5 1LN, UK
 +44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
 2 Wing Yip Street
 Kwun Tong, Kowloon
 Hong Kong
 +852 2176 3333

ARTESYN™
 An Advanced Energy Company

www.artesyn.com

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com
 For support: productsupport.ep@artesyn.com